

WGP-L100/S

LOVOL Series

Features:

- Rotate speed governor: Mechanical governor
- Excitation system: Self excited, SHUNT
- A.V.R model: SX440
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 12V sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy (Only for Soundproofed sets)
- 50°C radiator max
- Oil pump on the engine
- Steel base frame with fork holes
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for daily running
- Drain points for fuel tank
- Operation Manual / Specifications



Dimensions and Weights

Model	L	W	H
WGP-L100	1800	860	1200
WGP-L100S	2480	1000	1400

Output Ratings

Genset Model	Prime Power	Standby Power
WGP-L100	100kVA/80kW	110kVA/88kW
WGP-L100S	100kVA/80kW	110kVA/88kW

Ratings at 0.8 power factor

Notes:

*Prime Power

Continuous duty operation, under variable load 24/24h-10% over load

**Standby Power

Standby duty, operation under variable load, without over load;

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m(328 ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998,

Ratings and Performance Data

Engine Model:	Lovol 1006TG2A
Alternator Brand:	WALT
Alternator Model:	WGP274C
Control System:	Auto Genset / AMF
Circuit Breaker Type:	3 Pole MCCB
Frequency & Phase:	50Hz & 3PH
Engine Speed: RPM	1500
Fuel Tank Capacity: L	
WGP-L100	10 hrs
WGP-L100S	10 hrs
Fuel Consumption: l/hr (100% Load)	
- Prime Power	20
- Standby Power	22

Engine Model: LOVOL 1006TG2A

Rated Output kW (PRP)	92
Rated Output kW (STANDBY)	94
Manufacturer	Tianjing LOVOL Engine
Model	1006TG2A
No.of Cylinders and Build	4 Cycle; In-line, 6 Cylinder Diesel
Aspiration and Cooling	Turbocharged
Bore × Stroke	100×127 mm
Compress the ratio	17.5:1
Cooling system	Water-cooled
Engine Speed/Frequency (rpm/Hz)	1500/50HZ
Coolant Capacity (L)	29.5
Starting System	Electric 12 volt DC
Displacement (L)	5.99
Lubricant system Capacity (L)	16.1
Battery Volatge / Capacity	12V DC
Governing Type	Mechanical
Air Filter	Dry Type
Fuel Consumption (Load L/h)	
110% Load	22.0
100% Load	20.0
75% Load	14.0
50% Load	9.0

Alternator Model: WGP274C

Alternator Physical Data

Manufactured by:	WALT
Model:	WGP274C
No. of Bearings:	Single
Insulation Class:	H
Winding Pitch Code:	2/3
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	Self excited,shunt
AVR Model:	SX440

Alternator Operating Data

Overspeed: rpm	2250rpm
Voltage Regulation: (Steady state)	±1.0%
Wave Form NEMA = TIF:	< 50
Wave Form IEC = THF:	< 2%
Air Flow: m3/s	0.1
Altitude: m	≤1000

Voltage Technical Data WGP-L100

Voltage	Prime	Standby
	kVA	kVA
380/220	100	110
400/230	100	110
415/240	100	110
440/254	100	110

Voltage Technical Data WGP-L100S

Voltage	Prime	Standby
	kVA	kVA
380/220	100	110
400/230	100	110
415/240	100	110
440/254	100	110

Control System DSE4620



Features:

- Large back-lit icon LCD display.
- 3-phase generator sensing.
- 3-phase generator and mains (utility) sensing.
- 600 V ph-ph nominal system compatibility.
- Generator & load power monitoring (kW, kV A, kV Ar, pf).
- Generator overload protection (kW).
- Configurable inputs & outputs.
- Fuel & crank outputs.
- Magnetic pick-up speed sensing.
- Battery voltage monitoring.
- Configurable event log (50).
- DSE Configuration Suite PC Software.
- Engine speed protection, engine hours counter, engine pre-heat, engine run-time scheduler, engine idle control for start/stop.

Control System DSE7420




Features:

- Microprocessor control, with high stability and credibility .
- Mains supply and generator operation monitoring.
- Indicating operation status and fault conditions.
- Multiple protections; multiple parameters display such as pressure, temperature.
- Manual and automatic work mode selectable.
- Real time clock for time and date display, overall runtime display, 99 log entries
- Overall power output display.
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed.
- Communication with PC via RS485 or RS232 interface, using MODBUS protocol.
- Engine ECU is available.
- Common USB cable is usable for parameter configuration.
- Multi-language is available

Optional

<p>Engine</p> <ul style="list-style-type: none"> • Water Jacket Preheater • Fuel-water separator • Oil pump • Oil preheater • Battery preheater 	<p>Alternator</p> <ul style="list-style-type: none"> • PMG excitation • Alternator heater • Winding Temperature Measuring • Anti-damp and anti-corrosion treatment • Anti-condensation heater 	<p>Generator Set</p> <ul style="list-style-type: none"> •Tools with the machine •Coolant (-30°C)
<p>Canopy</p> <ul style="list-style-type: none"> • Hired type • Trailer 	<p>Fuel System</p> <ul style="list-style-type: none"> • Low fuel level alarm • Automatic fuel feeding system • Fuel T-valves • Dual Wall Integral Fuel Tanks • Dual Wall Sub-base Fuel Tanks • Automatic Fuel Fill Options • Fuel level shut down sensor 	<p>Control System</p> <ul style="list-style-type: none"> • AMF function • ATS control cabinet • Double HZ & Volt • ABB & MCCB
<p>Air Inlet system</p> <ul style="list-style-type: none"> • Air pre-heater 	<p>Lube system</p> <ul style="list-style-type: none"> • Manual sump pump • Lubricant oil pre-heater 	<p>Starting /Charging system</p> <ul style="list-style-type: none"> • Jacket water heater

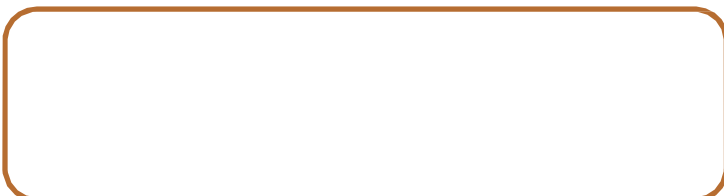

WALT GLOBAL POWER EQUIPMENT CO.,LTD

E-mail: sales@waltpower.com
 Walt reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice.
 Please contact the salesman before ordering.
 2018 by WALT, All right reserved